

**Clack Garnet is a high hardness, high density granular filter media. It is normally used as the lower (final) filtration of a multi-media bed down flow filtration system.**

# Garnet

## ADVANTAGES

- High specific gravity allows unique filter design
- In combination with other filter medias, higher flow rates, higher loading and better filtration can be achieved
- High hardness reduces attrition and provides for years of reliable service
- An excellent support bed for other high density medias
- Clack garnet meets AWWA B100-96 specifications.

## PHYSICAL PROPERTIES

- Color: Light tan to reddish purple
- Type: Almandite
- Crystal System: Cubic
- Hardness: 7.0-7.5 (Mohs scale)
- Bulk Density:
  - #8 Garnet: 140 lbs./cu. ft.
  - #8-12 Garnet: 140 lbs./cu. ft.
  - #30-40 Garnet: 130 lbs./cu. ft.
- Effective Size:
  - #8 Garnet: 2.0 mm
  - #8-12 Garnet: 1.5 mm
  - #30-40 Garnet: 0.35 mm
- Uniformity Coefficient:
  - #8 Garnet: 1.3
  - #8-12 Garnet: <1.5
  - #30-40 Garnet: 1.4
- Specific Gravity: 3.8-4.2 gm/cc
- Free Silica: Minimal
- Acid Solubility: Minimal

## CONDITIONS FOR OPERATION

- Wide range - application specific

Called multi-media or mixed media filtration, the high density, small grain size of Clack #30-40 Garnet solves a major filtration problem. In a single media granular filter such as a sand filter, the material will hydraulically classify during backwash according to granule size, the smallest rising to the top. When water flows downward through the sand, the fine particles at the top of the bed do most of the straining of the sediment. The solids form a cake on the surface with filtration typically taking place in the top few inches. As the cake forms, the filtration becomes finer and the head loss increases exponentially with time.

The ideal situation would be to have the large grains of media at the top to trap the large solids, and a uniformly decreasing grain size in the direction of fluid flow with the small grains at the bottom to do the final polishing. The penetration of the solids into the entire bed allows for increased solids storage, longer filter runs, and higher filtration rates.

A properly designed multi-media system will maintain its unique grading of large grains on top and small grains on


the bottom and provide superior performance even after many backwashings. This stable condition of large grains above finer ones is achieved by the use of materials of different sizes and specific gravities. Garnet with its high specific gravity of 4.0 forms the lower fine grain layer, its 0.3 mm effective size can filter down to the 10-20 micron range. Filter Sand, (effective size of 0.5 mm) and Anthracite, (effective size of 0.9 mm), or Filter-Ag® can form the larger, less dense layers.

Multi-media filtration technology is applicable to both water and waste water treatment. Custom designed filters with varying filter bed configurations can be designed to meet specific needs. For the majority of municipal and industrial water supply applications, a filter bed composed of 55% low density material, 30% medium density material, and 15% high density material is recommended.


#8 Garnet at 140 lb/ft<sup>3</sup> is a good choice for support beds when using other high density filtration media such as high purity Corosex II or the new manganese dioxide oxidation medias such as Pyrolox.



Service Flow Pressure Drop

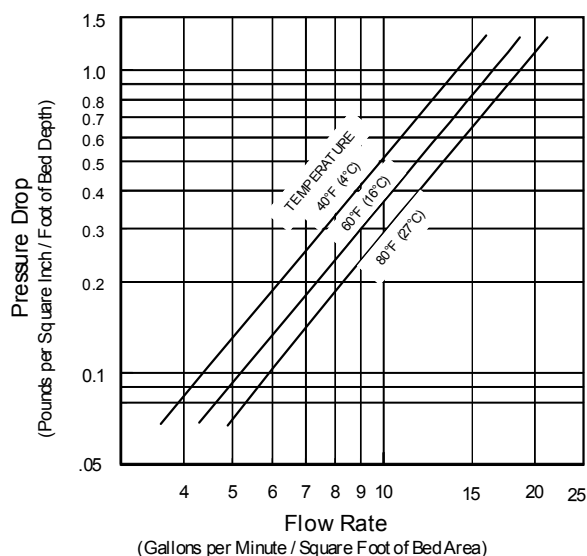

Backwash Bed Expansion

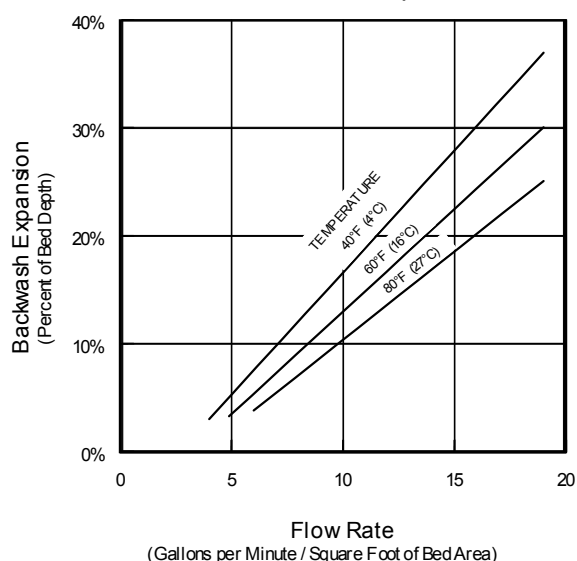

Garnet mineral sand manufactured by International Garnet Co., Inc. is classified by Underwriters Laboratories Inc.® in Accordance with Standard ANSI/NSF 61

**ORDER INFORMATION**

| Part No. | Description   | Cu. Ft./Bag     | Wt./Cu. Ft.* | Bags/Pallet | Weight/Pallet | Pallet Dimensions |
|----------|---------------|-----------------|--------------|-------------|---------------|-------------------|
| A8035    | Garnet #8     | 0.71 (100 lbs.) | 140 lbs.     | 40          | 4050 lbs.     | 44" x 36" x 40"   |
| A8036    | Garnet #8-12  | 0.71 (100 lbs.) | 140 lbs.     | 40          | 4050 lbs.     | 44" x 36" x 40"   |
| A8037    | Garnet #30-40 | 0.77 (100 lbs.) | 130 lbs.     | 40          | 4050 lbs.     | 44" x 36" x 40"   |

\*Weight per cubic foot is approximate.

**Clack Corporation**   
 4462 Duraform Lane  
 Windsor, Wisconsin 53598-9716 USA  
**Phone (608) 846-3010**  
 Fax (608) 846-2586  
 Sales Fax (800) 755-3010  
 www.clackcorp.com

Form No. 2355  
 Updated 3/01

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, Clack makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this publication should not be understood as recommending the use of our products in violation of any patent or as a license to use any patents of the Clack Corporation.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Clack will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.